

EN V10-73-0098 **BRAKE LIGHT SWITCH**

Important fitting instructions!

Removal:

1. The brake pedal is not allowed to be pressed during the dismantling!!
2. Please only take hold of the switch on the middle part of the casing and unscrew it leftwards by 45° (**Fig. 1**).

Installation:

1. Pull out the tappet a little more than the removed, original brake light switch (**Fig. 2**).
2. The assembly opening corresponds to the switch's shape (**Fig. 3**). Put the switch into the corresponding opening.
3. The brake pedal is not allowed to be pressed during the whole mounting!!
4. Press the switch carefully into the opening until it stops. The tappet will automatically engage at the correct length.
5. Please only take hold of the switch on the middle part of the casing and screw it rightwards by 45° (**Fig. 4**).
6. Function check: The switch is only activated after the fitting. The switch can only be tested in the installed status.



Fig. 1

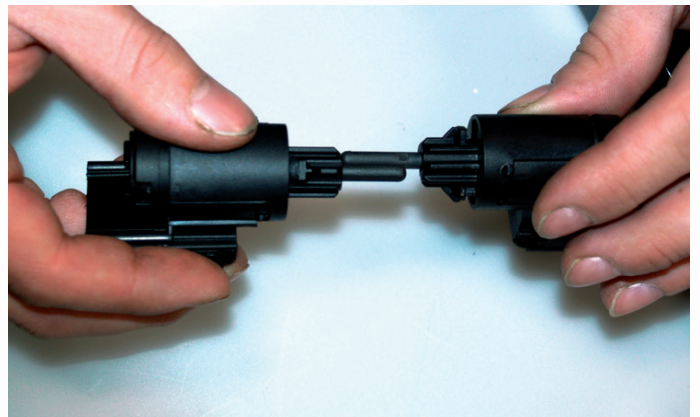


Fig. 2

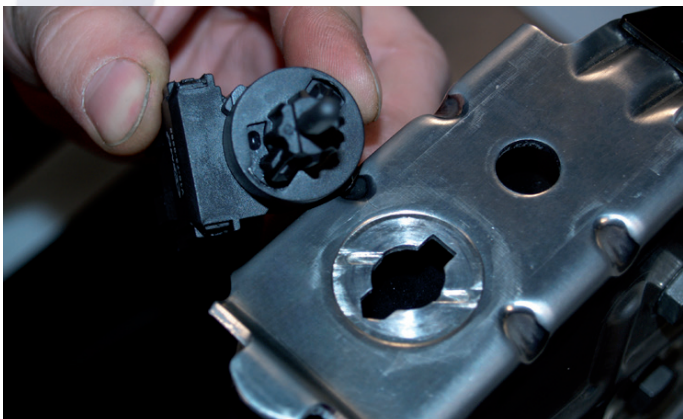


Fig. 3



Fig. 4